

MODEL

OC SERIES | OC15AV
INDUSTRIAL OPEN CHASSIS LCD

- Protective AR Optical Glass
- Rugged Aluminum Industrial Construction
- Frame mount and VESA chassis mounting
- VGA, Composite and S-Video Inputs
- Detachable Hardwired remote control for OSD

Custom Options: Touch screen, High Brightness Panel




SPECIFICATION

OC Series available in 15", 17"
TFT LCD 6.4", 10.4", 12.1" Available by special order

LCD Panel	15.0" TFT LCD Display
Brightness	500 cd/m2
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Max. Resolution	1024 x 768 XGA
Contrast Ratio	400:1
Back Light	4 CCFL
Display Area	304 x 228mm
Response Time	16ms (Typical)
Display Colors	16.7M
Viewing Angle	140°(H), 120°(V) (Typical)
VGA Input Signal	RGB Analog 0.7V Peak to Peak
Signal Connector	15 Pin D-sub for VGA RCA Video in, S-Video
OSD Control	Power Switch, Menu, Select (+, -), Auto
Operating Temperature	0° ~ 50° C
Storage Temperature	-20° ~ 60° C
Power Consumption	35W
Power Supply	External 48 W Power Adapter
Safety	CE, FCC, TUV-GS, UL Compliant
Front Bezel	Option: Protection metal frame
LCD Protection	Option: Anti-Reflection Tempered Glass
Touch Screen	Option Resistive/Capacitive touch sensor
Mounting	Frame mount, VESA Mount (VESA 75/100)
Dimension	15.8" X 12.42" X 3.6" 401.6 X 315.5 X 91(mm)
Gross Weight	--

All specifications are subject to change without prior notice.

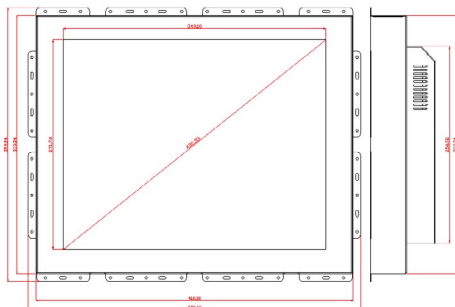

Dimensions in mm.

