


MODEL

HO SERIES | HO15AV

SUNLIGHT READABLE INDUSTRIAL OPEN-FRAME DISPLAYS

- Rugged Aluminum Industrial Construction
- Frame mount and VESA chassis mounting
- VGA, Composite and S-Video Inputs


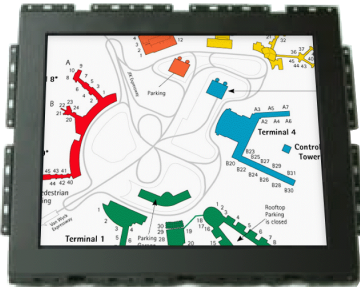


SPECIFICATION

HO Series available in 15", 17"

LCD Panel	15" TFT LCD
Brightness	1,700 cd/m2
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Max. Resolution	1024 x 768 XGA
Contrast Ratio	450:1
Back Light	12 CCFL
Display Area	304 x 228mm
Response Time	40ms(Typ.)
Display Colors	16.7M
Viewing Angle	160°(H), 140°(V)
VGA Input Signal	RGB Analog 0.7V Peak to Peak
Signal Connector	15 Pin D-sub for VGA RCA Video in, S-Video
OSD Control	Power Switch, Menu, Select (+,-),Auto
Operating Temperature	0°~ 50° C
Storage Temperature	-20° ~ 60° C
Power Consumption	60W
Power Supply	External 80 W Power Adapter
Safety	CE, FCC, TUV-GS, UL Compliant
Front Bezel	Option: Protection metal frame
LCD Protection	Option: Anti-Reflection Tempered Glass
Touch Screen	Option Resistive/Capacitive touch sensor
Mounting	Frame mount, VESA Mount (VESA 75/100)
Dimension	15.8" X 12.42" X 3.6" 401.6 X 315.5 X 91(mm)
Gross Weight	--

All specifications are subject to change without prior notice.

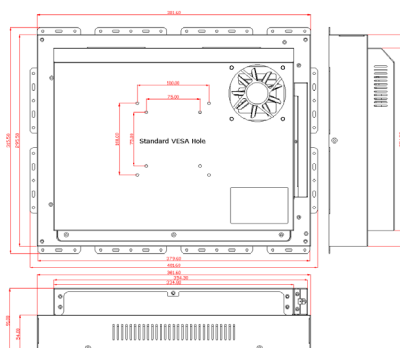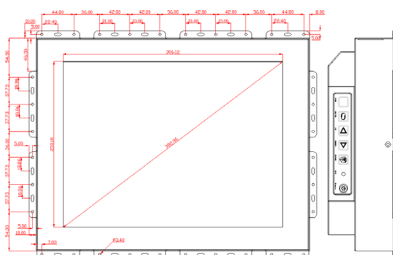

Dimensions in mm.