


MODEL

HO SERIES | HO17AV

SUNLIGHT READABLE INDUSTRIAL OPEN-FRAME DISPLAYS

- Rugged Aluminum Industrial Construction
- Frame mount and VESA chassis mounting
- VGA, Composite and S-Video Inputs


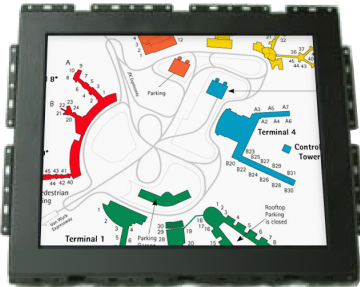


SPECIFICATION

HO Series available in 15", 17"

LCD Panel	17" TFT LCD
Brightness	1,000 cd/m2
Pixel Pitch(mm)	0.264(H) x 0.264(V)
Max. Resolution	1280 x 1024 SXGA
Contrast Ratio	500:1
Back Light	12 CCFL
Display Area	338 x 270mm
Response Time	16ms(Typ.)
Display Colors	16.7M
Viewing Angle	150°(H), 150°(V)
VGA Input Signal	RGB Analog 0.7V Peak to Peak
Signal Connector	15 Pin D-sub for VGA RCA Video in, S-Video
OSD Control	Power Switch, Menu, Select (+,-),Auto
Operating Temperature	0°~ 50° C
Storage Temperature	-20° ~ 60° C
Power Consumption	70W
Power Supply	External 80 W Power Adapter
Safety	CE, FCC, TUV-GS, UL Compliant
Front Bezel	Option: Protection metal frame
LCD Protection	Option: Anti-Reflection Tempered Glass
Touch Screen	Option Resistive/Capacitive touch sensor
Mounting	Frame mount, VESA Mount (VESA 75/100)
Dimension	17" X 14" X 3.3" 430.3 X 354.4 X 84(mm)
Gross Weight	--

All specifications are subject to change without prior notice.

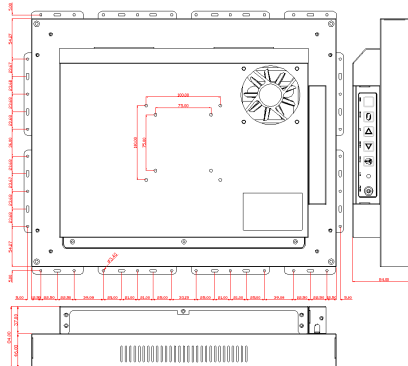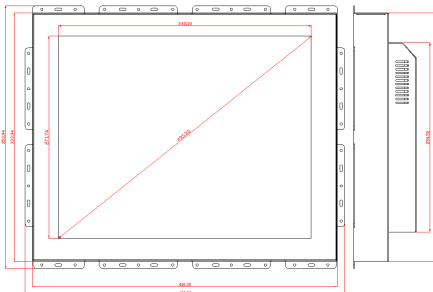

Dimensions in mm.