

MODEL

HP SERIES | HPI7AV



SUNLIGHT READABLE INDUSTRIAL PANEL MOUNT DISPLAYS WITH VANDAL PROOF GLASS

- 17" TFT LCD
- Protective AR Optical Glass
- Rugged Aluminum Industrial Construction
- Back screw flush and VESA chassis mounting
- VGA, Composite and S-Video Inputs
- Detachable Hardwired remote control for OSD

SPECIFICATION

HP Series available in 15", 17"

LCD Panel	17" TFT LCD
Brightness	1,000 cd/m2
Pixel Pitch(mm)	0.264(H) x 0.264(V)
Max. Resolution	1280 x 1024 SXGA
Contrast Ratio	500:1
Back Light	12 CCFL
Display Area	338 x 270mm
Response Time	16ms(Typ.)
Display Colors	16.7M
Viewing Angle	150°(H), 150°(V)
VGA Input Signal	RGB Analog 0.7V Peak to Peak
Signal Connector	15 Pin D-sub for VGA RCA Video in, S-Video
OSD Control	Power Switch, Menu, Select (+,-),Auto
Operating Temperature	0° ~ 50° C
Storage Temperature	-20° ~ 60° C
Power Consumption	70W
Power Supply	External 80 W Power Adapter
Safety	CE, FCC, TUV-GS, UL Compliant
Front Bezel	Anode treated Aluminum front bezel, IP65 Compliant
LCD Protection	Anti-Reflection Tempered Glass
Touch Screen	Option Resistive/Capacitive touch sensor
Mounting	Panel Mount, VESA Mount (VESA 75/100)
Dimension	17.6" X 14.6" X 3.5" 448 X 371.4 X 89(mm)
Gross Weight	--

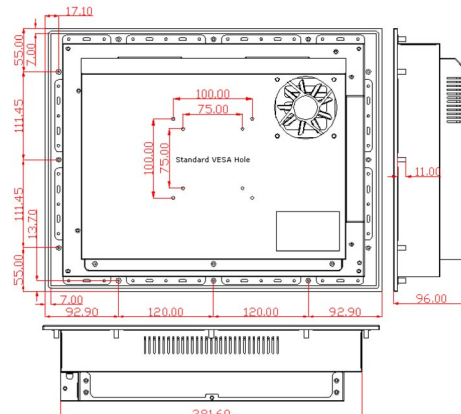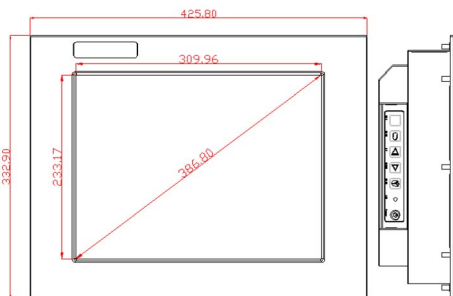

All specifications are subject to change without prior notice.

Dimensions in mm.