

**MODEL**

**HP SERIES | HP15AV**

SUNLIGHT READABLE INDUSTRIAL PANEL MOUNT DISPLAYS WITH VANDAL PROOF GLASS

- 15" TFT LCD
- Protective AR Optical Glass
- Rugged Aluminum Industrial Construction
- Back screw flush and VESA chassis mounting
- VGA, Composite and S-Video Inputs
- Detachable Hardwired remote control for OSD




**SPECIFICATION**

HP Series available in 15", 17"

<b>LCD Panel</b>	15" TFT LCD
<b>Brightness</b>	1,700 cd/m2
<b>Pixel Pitch(mm)</b>	0.297(H) x 0.297(V)
<b>Max. Resolution</b>	1024 x 768 XGA
<b>Contrast Ratio</b>	450:1
<b>Back Light</b>	12 CCFL
<b>Display Area</b>	304 x 228mm
<b>Response Time</b>	40ms(Typical)
<b>Display Colors</b>	16.7M
<b>Viewing Angle</b>	160°(H), 140°(V)
<b>VGA Input Signal</b>	RGB Analog 0.7V Peak to Peak
<b>Signal Connector</b>	15 Pin D-sub for VGA RCA Video in, S-Video
<b>OSD Control</b>	Power Switch, Menu Select (+,-),Auto
<b>Operating Temperature</b>	0°~ 50° C
<b>Storage Temperature</b>	-20° ~ 60° C
<b>Power Consumption</b>	60W
<b>Power Supply</b>	External 80 W Power Adapter
<b>Safety</b>	CE, FCC, TUV-GS, UL Compliant
<b>Front Bezel</b>	Anode treated Aluminum front bezel, IP65 Compliant
<b>LCD Protection</b>	Anti-Reflection Tempered Glass
<b>Touch Screen</b>	Option Resistive/Capacitive touch sensor
<b>Mounting</b>	Panel Mount, VESA Mount (VESA 75/100)
<b>Dimension</b>	16.8" X 13.1" X 3.8" 425.8 X 332.9 X 96(mm)
<b>Gross Weight</b>	--

All specifications are subject to change without prior notice.

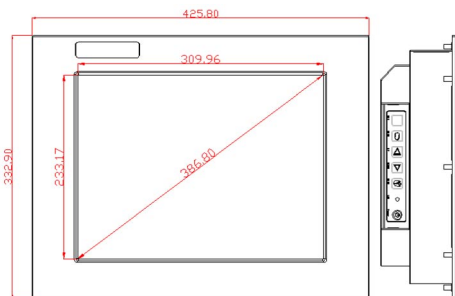

Dimensions in mm.

